


Designed For AASHTO H-20 Loading
Concrete

Concrete Top Shown, Openings
Can Be Cast In As Required.
Cast Iron Top Available.

Minimum 4000 psi @ 28 Days

Air Entrainment - 5% - 8%

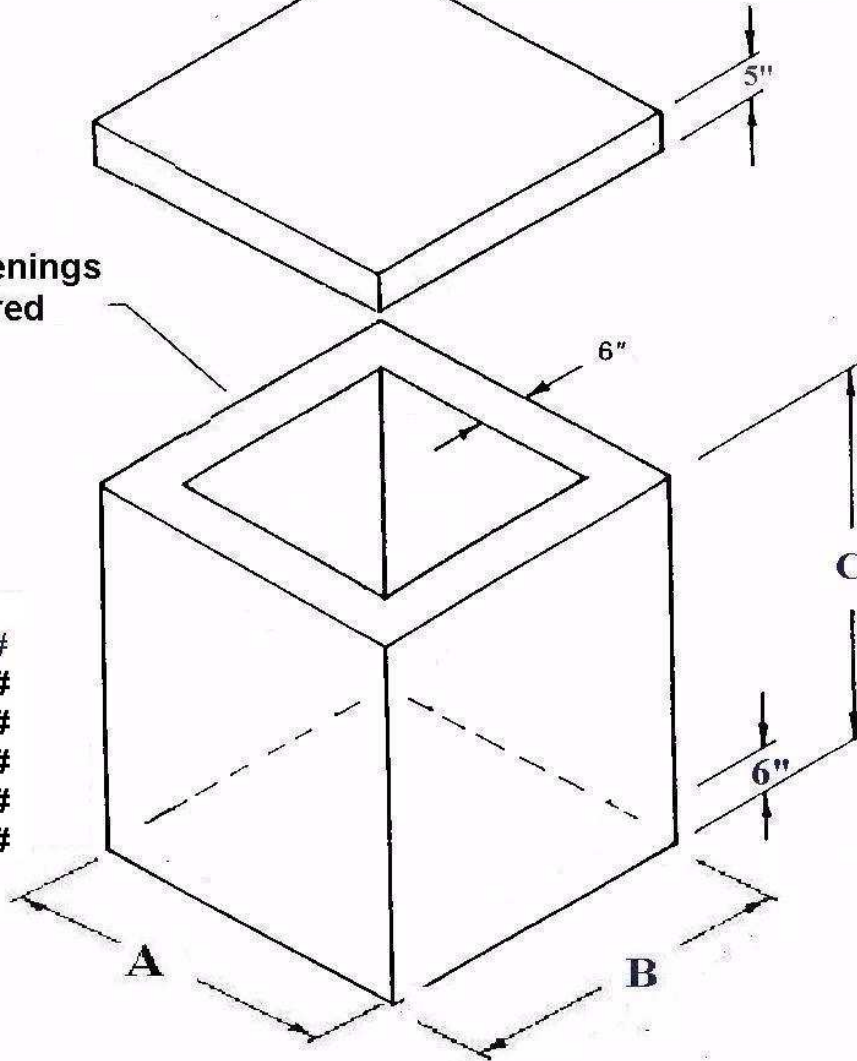

Sidewall Openings
As Required

Weights

- Top Slab = 757#
- 2-6 CB = 3128#
- 3-0 CB = 3572#
- 3-6 CB = 4016#
- 4-0 CB = 4460#
- 4-6 CB = 4904#

Catch Basins

	A	B	C
2-6 CB =	3'6"	3'6"	3'0"
3-0 CB =	3'6"	3'6"	3'6"
3-6 CB =	3'6"	3'6"	4'0"
4-0 CB =	3'6"	3'6"	4'6"
4-6 CB =	3'6"	3'6"	5'0"

Grimm Building Materials Co., Inc.

Phone - (518) 272-1100 Fax - (518) 272-0229

Precast Concrete Division

96 Albany Avenue

P.O. Box 157

Green Island - Troy, New York 12181

www.grimmbldg.com